

ZHS-0403 IR-CUT

ISO/TS16949 ISO9000 ISO14000
RoHS REACH CE UL VDE TÜV



总重量 Total Weight: 4.5g

应用范围: 监控摄像机

APPLICATION: CCTV Camera

综合特性

Characteristics:

1. 驱动类型: 励磁式

Drive Type: Excitation Type

2. 工作电压: DC 3.3-12V

Voltage :DC 3.3-12V

3. 工作环境 Operating Environment:

温度: -30 ~ 85℃

湿度: 0 ~ 90%

Temp: -30 ~ 85℃

Relative humidity: 0 ~ 90%

4. 滤光片切换响应时间: 50ms

Response time: 50ms

5. 寿命: 典型值为10万次 (on

0.05s, off 0.25s)

Lify cycle: 1,000, 00

cycles (on 0.05s, off 0.25s)

6. 绝缘等级: B类

Insulation class: class B

7. 安装CCD和CMOS芯片的窗口高度

A和孔距B尺寸及镜头座可以提供

不同规格, 并可以按客户要求定




做. There are several window

height size and hole distance

size for selection, also can do

according to customer requirments


类型Type: M12

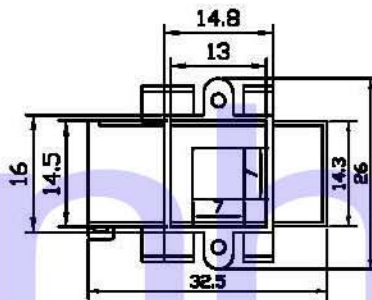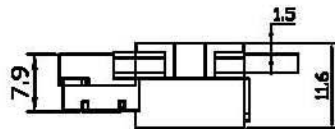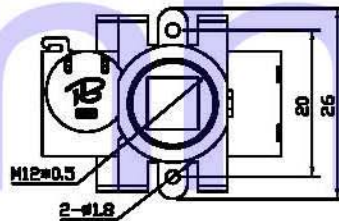

单位:mm Units:mm

固定座典型结构



Lens holder type:

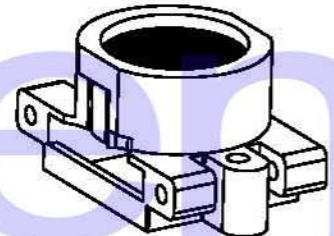

塑胶Plastic M12

下底座关键尺寸

Lens holder size:




窗口高 Window Height: A=1.5/2.5

孔距 Hole Distance: B=20

滤光片光谱图

1. IR Filter spectrum :

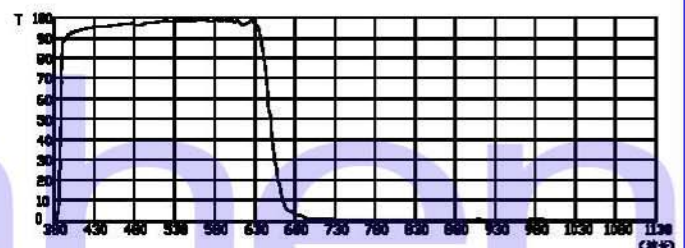

2. AR Filter spectrum :

