


ZHV-0626L/S Solenoid Valve

ISO/TS16949 ISO9000 ISO14000
RoHS REACH CE UL VDE TÜV



类型: 二位三通/二位二通 TYPE: two position Three way
TYPE: Two position two way

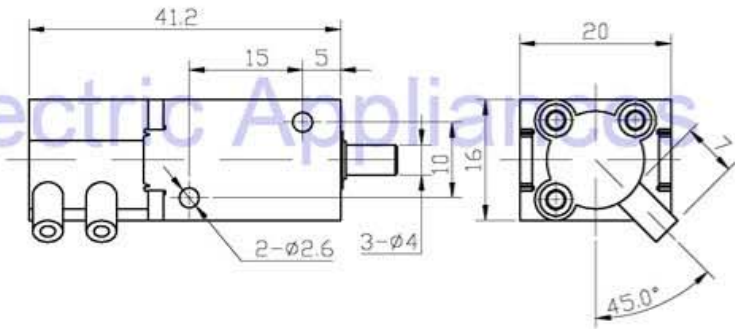

总重量 Total Weight: 44g
应用范围: 食品真空包装、机美腿器、制氧机
APPLICATION: LEG MASSAGER

单位:mm Units:mm



综合特性 GENERAL FEATURES

1. 常用压力: 0~750mmHg/0~1Bar
Pressure: 0~750mmHg/0~1Bar
2. 最小通径: $\phi 1.5\text{mm}$
Min Orifice: $\phi 1.5\text{mm}$
3. 流体介质: 空气
Fluid medium: Air
4. 寿命: 典型值为500万次 (on 1s, off 1s)
Lify cycle: 5,000,000 cycles (on 1s, off 1s)
5. 绝缘等级: B类
Insulation class: class B

COIL DATA 线圈资料

$$\text{工作周期}(\%) = \frac{\text{工作时间}}{\text{工作时间} + \text{断开时间}} \times 100\%$$

$$\text{Duty cycle}(\%) = \frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$$

最大工作时间(秒) MAX. "on" time in seconds

瓦特(W) (20°C) Watts at 20°C

安匝数AT(20°C) Ampere-turns at 20°C

型号 Type no.	阻值(20°C) Resistance (Ω) $\pm 10\%$	线圈匝数 No. Turns	连续 Continuous 100%	间断 Or less 50%	间断 Or less 25%	间断 Or less 10%
ZHV-0626L-XX A XX	15	1080	6	8.5	12	19
No symbol L S	60	2160	12	17	24	38
三通 Three Way 常闭 NC 常开 NO	240	4320	24	34	48	76
电压 Voltage (V)	960	8640	48	68	96	152
系列号 Serial No.: A, B, C...						
电阻 Resistance (Ω)						